

V6R: Through valve with female thread, PN 16

How energy efficiency is improved

Accurate control with high reliability.

Areas of application

Continuous control of cold and hot water or air in closed networks¹⁾. Water quality as per VDI 2035. Assembly with actuators AVP 142 and AV43 as regulating unit.

Features

- Nominal pressure PN 16
- Nominal diameter DN15, DN25, DN40 and DN50 with reduction steps
- Basic characteristic equal percentage (F3 . . .), or linear (F2 . . .)
- Characteristic equal percentage or linear
- With the spindle retracted, the valve is closed
- Closes against or with the pressure

Technical description

- Valve with female thread DIN EN ISO 228-1 G
- Valve body and seat in gun metal
- Stainless steel spindle
- Plug made of stainless steel DN15 or brass from DN20
- Stuffing box made of brass with EPDM wiper ring and double O-ring seal

Type	Nominal diameter DN	k_{VS} value m ³ /h	Valve plug material	Weight kg
V6R 15 F350	15	0.4	stainless steel	1.2
V6R 15 F340	15	0.63	stainless steel	1.2
V6R 15 F330	15	1	stainless steel	1.2
V6R 15 F320	15	1.6	stainless steel	1.2
V6R 15 F310	15	2.5	brass	1.2
V6R 15 F300	15	4	brass	1.2
V6R 25 F310	25	6.3	brass	1.6
V6R 25 F300	25	10	brass	1.6
V6R 40 F310	40	16	brass	3.4
V6R 40 F300	40	25	brass	3.4
V6R 50 F300	50	35	brass	4.6

Operating temperature ¹⁾	-15...130 °C	Valve stroke	14 mm
Operating pressure	up to 120 °C 16 bar up to 130 °C 13 bar	Dimension drawing	7M100
Valve curve	equal percent	Fitting instructions	MV 505580
Control ratio	50 (typical)	AVP142 Complete regulating unit	MV 505766
Leakage rate	≤ 0.05% of k_{VS} -value	AV43 Regulating unit	MV 43190
		AV43 Fitting	MV 40.136

Variants

F2 . . With linear valve curve (available from DN 15 k_{VS} 4 m³/h onwards only), same price and pressure as **V6R..F3..**

Accessories

0217268 . . . Stuffing-box heating 15 W; specify when ordering: 24V = /001, 230V = /004, MV 505498

0360391 . . . Union piece incl. asbestos-free seal, 2 pieces required; specify when ordering: DN 15 = /015, DN 25 = /025 etc.

DN	15	25	40	50
----	----	----	----	----

0378034 001 Valve with stuffing box, silicone-free; synthetic lubricant; max. 130 °C


¹⁾ At temperatures under 0 °C, use stuffing-box heating (accessory)



T04230





Y07544



B01133

Pressure-stroke-curve
(with integrated valve)



B09804

— As delivered ex works
- - Fitting variant A

Combination: pneumatic drive AVP142, AV43

Drive reversible max. pressure p_{stat} Operating time ¹⁾	AVP142 F001 ≤ 16 bar 10 s			AVP142 F002, F003 ≤ 13 bar 10 s			AV43 P15 ≤ 16 bar 14 s		
	Δp_{max}	Δp_s		Δp_{max} ²⁾	Δp_s		Δp_{max}	Δp_s	
Valve									
V6R 15	4.0	16.0		4.0	16.0		4.0	16.0	
V6R 25	4.0	13.6		4.0	16.0		4.0	16.0	
V6R 40	3.0	3.1		1.0	7.3		3.0	4.0	
V6R 50	2.0	2.3		0.8	5.5		2.0	3.3	

Complete type designation: Valve and drive each with F-variant
 Valve: F-variant, technical data and accessories, see valve type table
 Drive: F-variant, technical data, accessories and fitting position, see Sect. 71
 Example: V6R 15 F300 / AVP142F001
 Valve is closed when actuator is pressureless = factory setting
 Valve is open when actuator is pressureless = on request


Δp_{max} [bar]= Max. permissible pressure difference across the valve at which the drive can still safely open and close the valve.
 Δp_s [bar]= Max. permissible pressure difference across the valve during malfunction at which the drive can close the valve.
 p_{stat} [bar]= Dormant press. at valve when pump is inactive. Takes into account the fluidic level of the plant and the pressure increase caused by the pressure tank or the steam pressure.

1) Based on the Centair air capacity (400 l_n/h) and a line of 20 m in length and 4 mm in diameter

2) When used with an XSP 31 positioner, the Δp_{max} values are seven times bigger; observe the Δp_v value (see additional technical details).

Operation

Using a pneumatic drive, the valve can be moved to any position. When the spindle is extracted, control passage A-AB is closed. Where pneumatic drives are used, the valves should not close with the pressure, otherwise pressure surges ensue.

Closing against the operating pressure**Engineering and fitting notes**

Can be fitted in any position except facing downwards.
 The ingress of condensate, dripping water etc. along the stem and into the drive should be prevented.
 When fitting the drive to the valve, care must be taken not to turn the valve plug on the two stops (seat), thus damaging the seal.
 The drive can be equipped with the XSP 31 or XSP 31G positioner should any of the following be demanded: a split range; an improvement in the setting accuracy; an increase in positional speed or air capacity; reversible direction of action (see Section 79).

Additional technical details

Type	Δp_v
V6R 15 F. 50	4
V6R 15 F. 40	4
V6R 15 F. 30	4
V6R 15 F. 20	4
V6R 15 F. 10	4
V6R 15 F. 00	4
V6R 25 F. 10	4
V6R 25 F. 00	4
V6R 40 F. 10	3
V6R 40 F. 00	3
V6R 50 F. 00	2

Δp_v in bar = max. pressure difference across the valve in any stroke position, limited by the noise level and erosion (max. values without being limited by the force of the drive).

Additional details on accessories

0217268/ . . . Heating for stuffing box 15 W; housing of light metal; connecting cable $3 \times 0.75 \text{ mm}^2$, earth connection, 1 m in length, cable end sleeves; degree of protection IP 54.

Additional details on model types

Valve body with female thread. Flat seal of copper at the body. Stuffing box with O-ring of ethylene-propylene.

Material numbers as per DIN

	Material no.	Description	DIN norm
Valve body	2.1096.01	G-Cu Sn 5 Zn Pb (Rg 5)	1705
Valve seat	2.1096.01	G-Cu Sn 5 Zn Pb (Rg 5)	1705
Spindle	1.4305	X 8 CrNiS 18 9	EN 10088-3
Plug	2.0402.26	Cu Zn 40 Pb 2 F43	17 672
Plug V6R 15 F. 20...F. 50	1.4305	X 8 CrNiS 18 9	EN 10088-3
Stuffing box	2.0401.10	Cu Zn 39 Pb 3 F36	17 672

Explanation of terms used **Δp_v :**

Maximum permissible pressure difference across the valve in any stroke position, limited by the noise level and erosion.

The valve as a traversed element is defined by this parameter specifically in its hydraulic behaviour. By monitoring cavitation, erosion and the noise thus produced, improvements can be achieved in both life expectancy and durability.

 Δp_{max} :

Maximum permissible pressure difference across the valve at which the drive can firmly open and close the valve.

Static pressure and fluidic influences are taken into account. This value helps to maintain smooth stroke action and valve sealing. In doing so, the valve's Δp_v value is not exceeded.

 Δp_s :

Maximum permissible pressure difference across the valve in the event of a malfunction (e.g. power failure, excess temperature or pressure, burst pipe) at which the drive can firmly close the valve and, if necessary, hold the full operating pressure against atmospheric pressure. Since this is a safety function with 'fast' stroke, Δp_s can be larger than Δp_{max} or, respectively, Δp_v . The resultant fluidic disturbances are soon overcome and play a minor role here.

On the three-way valves, the values apply only for the control passage.

 Δp_{stat} :

Line pressure across the valve. This corresponds largely to the dead pressure when the pump is switched off, e.g. due to the level of liquid in the plant, an increase in pressure via the pressure store, steam pressure etc.


Where the valves close with the pressure, the static pressure plus the pump pressure should be used.

Technical information

- Pressure and temperature specifications DIN 2401
- Flow parameters VDI/VDE 2173
- Sauter slide rule for valve sizing 7 090011 003
- Slide rule manual 7 000129 003
- PC program "Valvedim" for Sauter valve sizing 7 000675 003
- Technical manual 'Regulating units': 7 000477 003
 - Parameters, Notes on installation, Control,
 - Pneumatic regulating units, General information

Dimension drawings 7M100


V6R

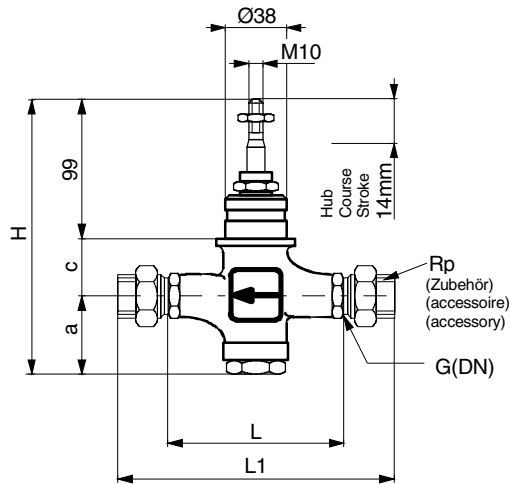


DN	a	c	H	L	L1	G	Rp
15	1/2"	56	29	184	85	159	1/2
25	1"	59	33	191	110	196	1
40	1 1/2"	76	47	222	150	256	1 1/2
50	2"	98	57	254	180	294	2

M361066a

AV43

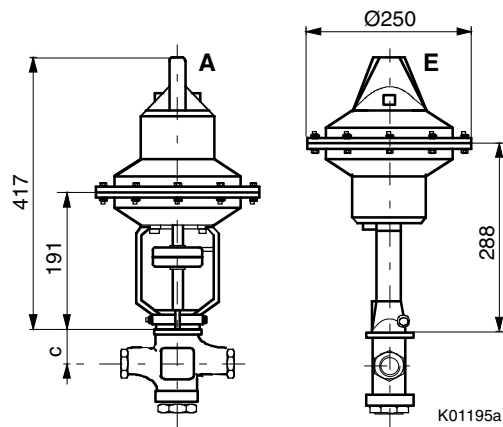

AVP142

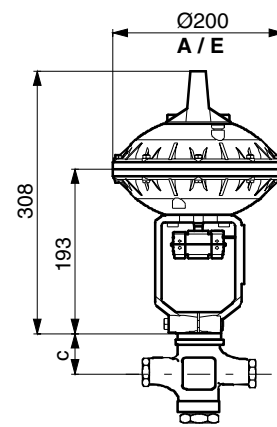

E: No pressure: CLOSED (as delivered ex works),
 A: No pressure OPEN (fitting variant)
 Take measurement 'c' from valve dimension drawing